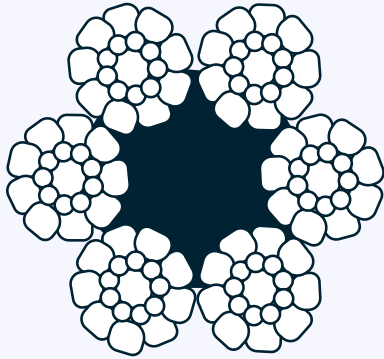
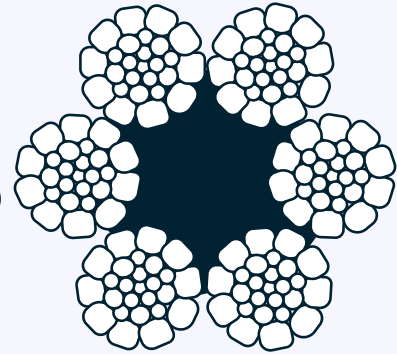

Tipo Tonina

6 x 19S (9-9-1)


Tipo Barracuda

6 x 26WS (10-5+5-5-1)


**CONSTRUCCIÓN : 6 x 19S (9-9-1) - Alma de fibra
 & 6 x 26WS (10-5+5-5-1) - Alma de fibra**

Diametro Nominal	Peso Aproximado Kg/100m		Carga de rotura mínima	
			Poly Core	CWR
mm.	Poly core	CWR	kN	kN
14	82	92	128	141
16	106	119	167	184
18	136	152	212	234
20	167	186	261	290
22	203	226	316	352
24	241	268	376	416
26	283	316	442	495
28	331	367	512	563
30	380	423	588	657